

PRODUCT DATASHEET

EM CONVERSION BOX

EMERGENCY CONVERSION BOX | Emergency conversion box to convert recessed luminaires to self-contained emergency luminaires



Areas of application

- Buildings requiring up to 3 h emergency light operation

Product benefits

- Conversion of selected LEDVANCE panels and downlights to emergency luminaires
- Emergency conversion unit reduces stock keeping complexity from emergency lighting
- Plug-and-play system allows easy installation
- Simple testing of luminaires with emergency lighting function thanks to integrated automatic test function
- Operation of integrated emergency lighting function with long life LiFePO4 battery with 3h battery discharge time

Product features

- Self-contained emergency conversion unit
- Function test of emergency lighting: automatic (AT)
- Battery technology: LiFePO4
- Recessed ceiling mounting




TECHNICAL DATA

Electrical data

Nominal voltage	220...240 V
Mains frequency	50...60 Hz

Dimensions & Weight

Length	292.00 mm
Width	81.00 mm
Height	41.00 mm
Product weight	350.00 g

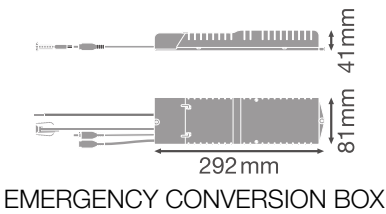

Materials & Colors

Glow Wire Test according to IEC 60695-2-12	850 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	0...+50 °C
Temperature range at storage	5...+35 °C
Type of connection	Screwless
Type of protection	IP20
Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling
Replaceable light source	No

BATTERY

Type of Battery	Lithium ion
Battery size [GMS]	Others

Nominal voltage of battery	3.2 V
Nominal capacity of battery	4500 mAh
Battery charging time	24 h

Emergency lighting

Type of emergency light operation	Maintained / Non-maintained
Type of emergency operation test	Automatic
Wattage in maintained operation mode	3,0 W
Wattage in emergency operation mode	3,0 W
Battery life in emergency operation mode	3 h
Integrated test switch	No





Certificates & Standards

Standards	CE / ENEC
-----------	-----------

Safety advice

- The conformity of the converted luminaire with all relevant statutory and legal safety and other requirements and technical standards, such as EN 60598-1 and EN 60598-2-22, has to be ensured during and after installation of the Emergency Conversion Box. It is also recommended to comply with ICEL 1004:2018. The converted luminaire has to be marked with a new data plate.
- All electrical connections must be made by a qualified person.
- Caution, risk of electric shock.

DOWNLOAD DATA

	Documents and certificates	Document name
	User instruction / safety instructions	UI EM CONV BOX 105V
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	CE declaration EM CONV BOX
	Certificates	Manufacturer Declaration Compatibility of the LEDV EM CONVERSION BOX

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075237025	Folding box 1	46 mm x 412 mm x 90 mm	400.00 g	1.71 dm ³

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075237032	Shipping box 8	428 mm x 208 mm x 206 mm	3412.00 g	18.34 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.