

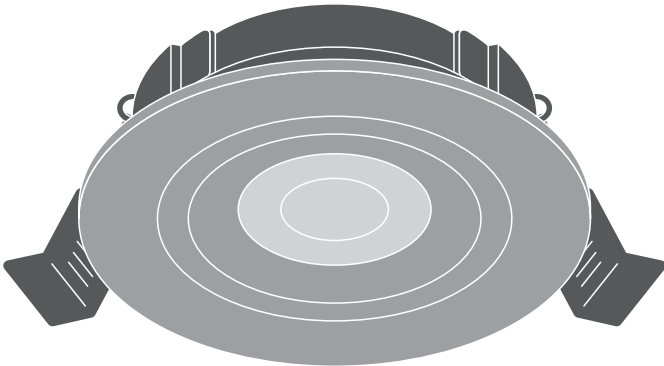


SPOT COMBO FIRE PROOF ADJUST

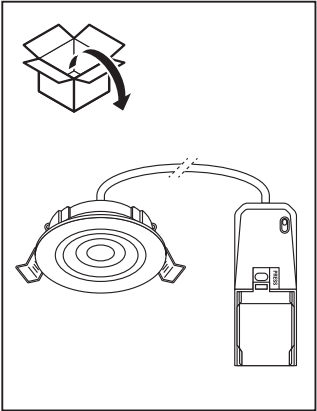


SP CBO FPADJ V 7W MS827 DIM IP65 WT	EAN	W	K	lm		lm/W		°C	V~	mA
				5W	7W	5W	7W			
				2700	570	770	115	110		
				3000	570	800	115	115		
				4000	600	840	120	120		
				6000	600	840	120	120		










	EAN	Hz	DF	IK	PF	∇(°)	CRI		CCT Lightcolour
SP CBO FPADJ V 7W MS827 DIM IP65 WT	4099854459948	50/60	0.9	03	>0.9	60	80	25000	2700/3000/4000/6000

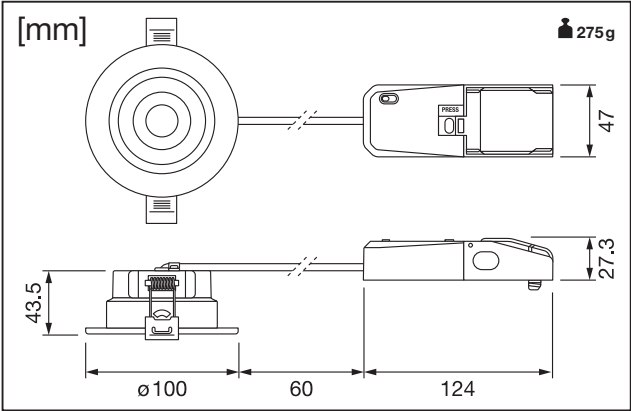



SPOT COMBO FIRE PROOF ADJUST

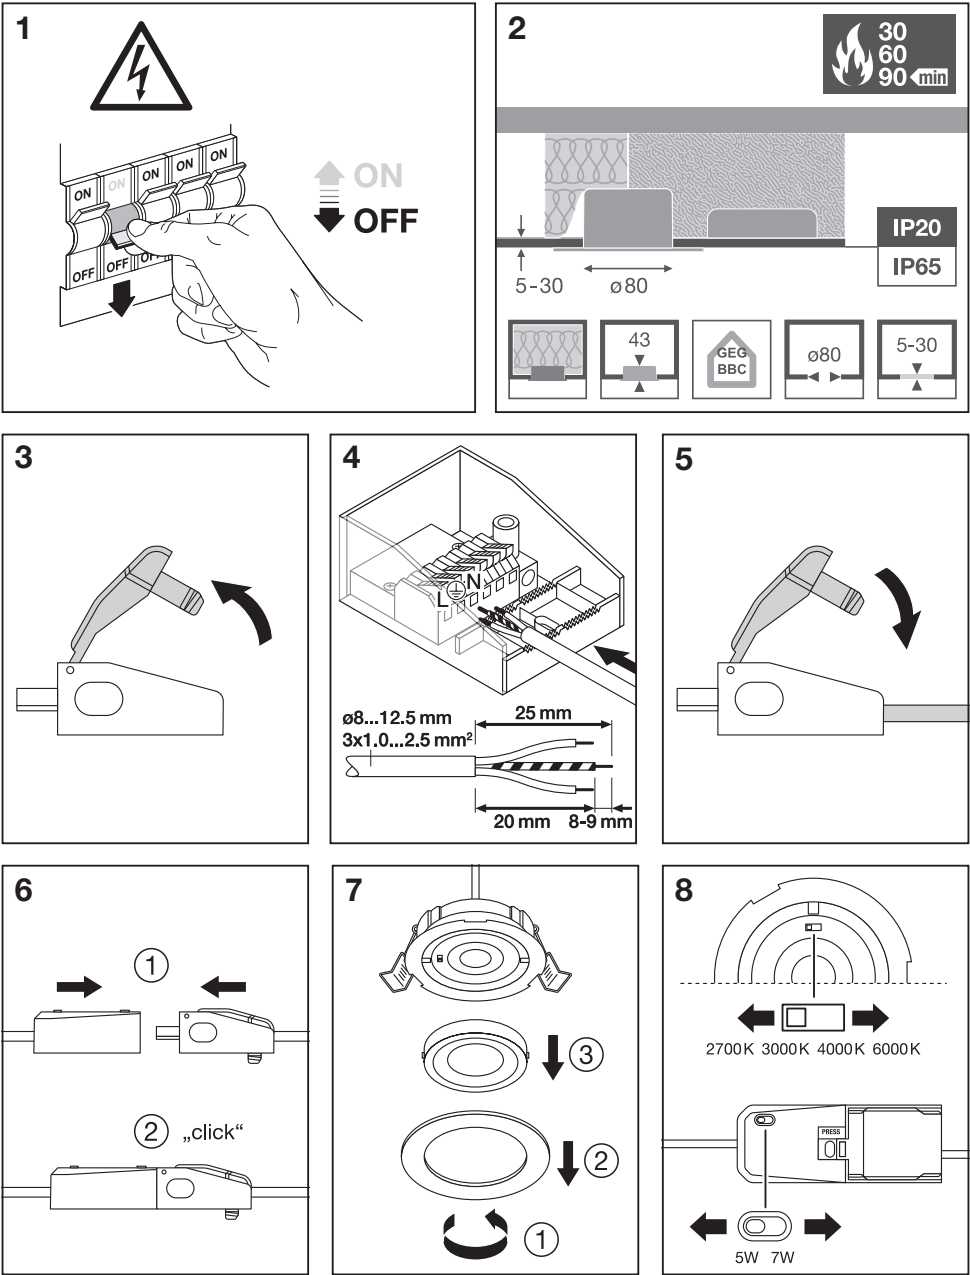

SPOT COMBO FIRE PROOF ADJUST

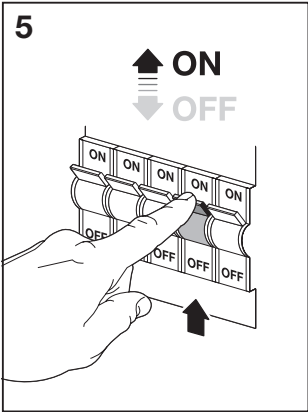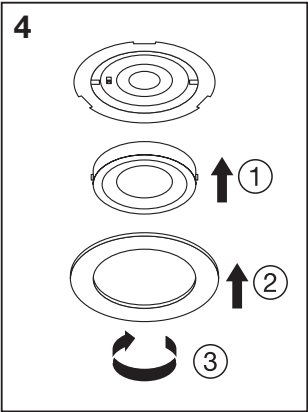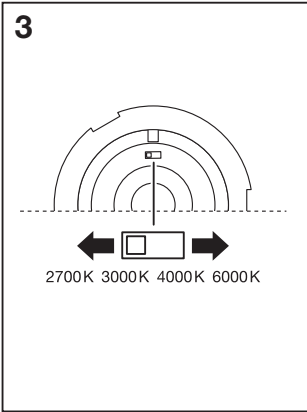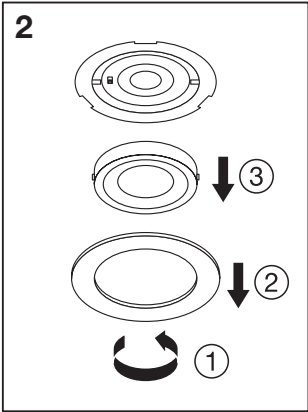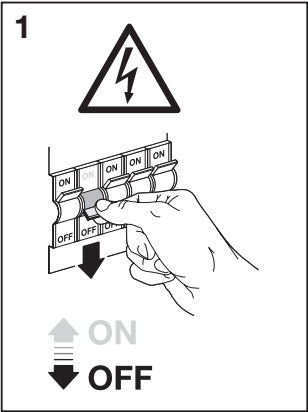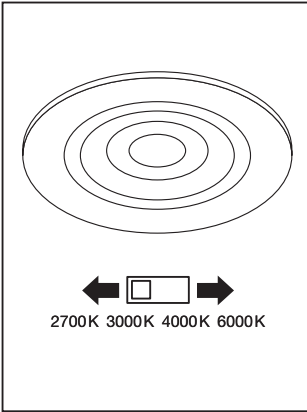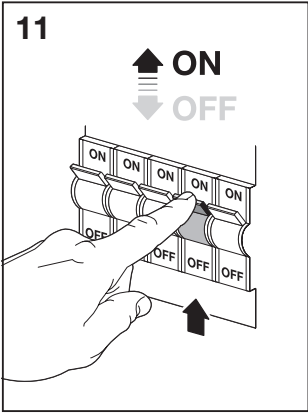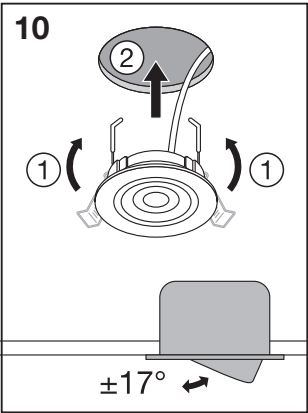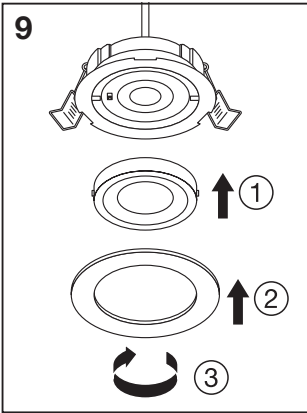


LOOP FUNCTION

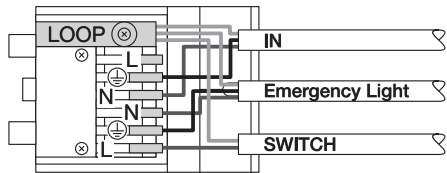





	EAN		Color		Diameter	Height
SPOT COMBO FIRE PROOF ADJUST VALUE 	4099854460142	SP CBO FP RING ADJ ROUND BK	BLACK		100	4
	4099854460173	SP CBO FP RING ADJ ROUND BN	BRUSHED NICKEL		100	4

SP CBO FPADJ V 7W
MS827 DIM IP65 WT

1



2



C10449057
G11230563
27.02.25

LEDVANCE SASU
CQM, 5 rue d'Altorf
67120 Molsheim France
www.ledvance.com

© LEDVANCE Ltd, Sterling House,
810 Mandarin Court, Warrington,
Cheshire, WA1 1GG, United Kingdom