


LED STRIP CONTROL DIRECT






	EAN	l x w x h [mm]	V	Input signal	IP	⊡ (°C)	Pmax per channel
LED STRIP CONTROL DIRECT	4099854550386	145 x 46.5 x 16	12-24VDC	Zigbee 3.0	20	-20...+50	96W

LED STRIP CONTROL DIRECT

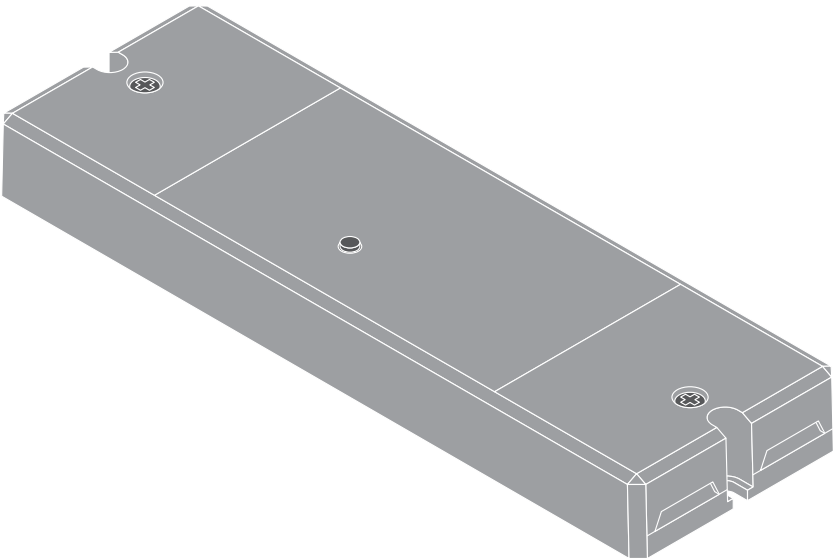



<https://2ly.link/21y8H>





EAN:
4058075427488




LED STRIP CONTROL DIRECT

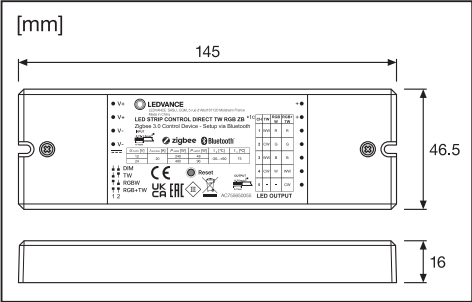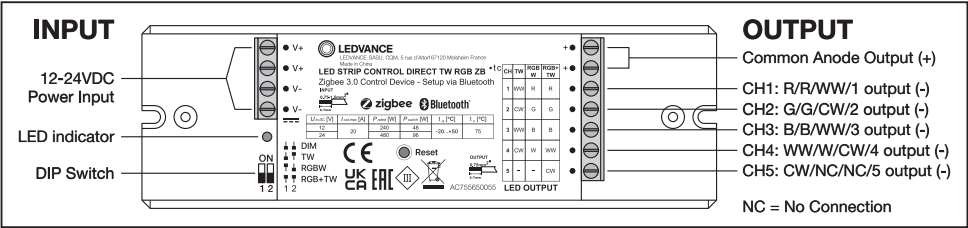

Input number of wiring groups	Current carried by terminal (A)	Nominal cross-sectional areas a mm ²
V+, V-	Over 2 up to and including 6	0.75
V+, V-	Over 6 up to and including 10	1
V+, V-	Over 10 up to and including 16	1.5
V+, V+, V-, V-	Over 16 up to and including 21	1.5

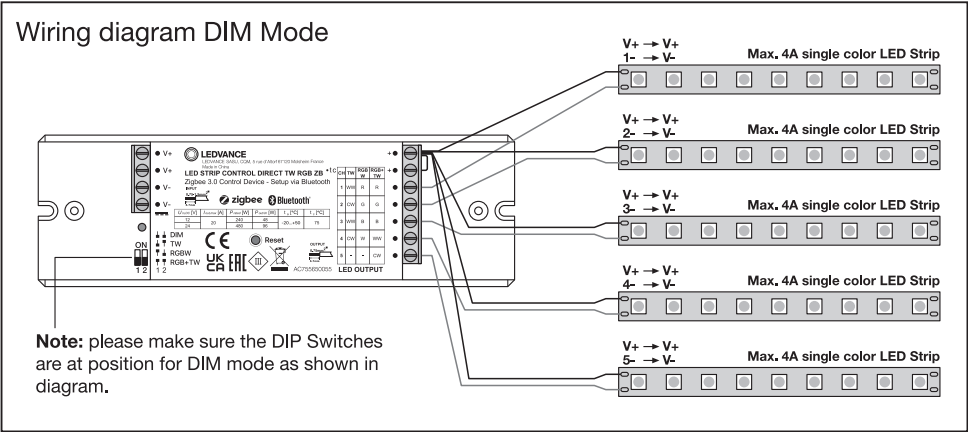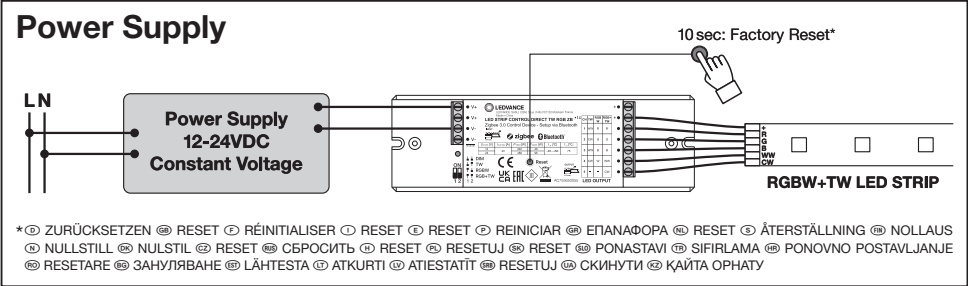


Wiring diagram TW Mode

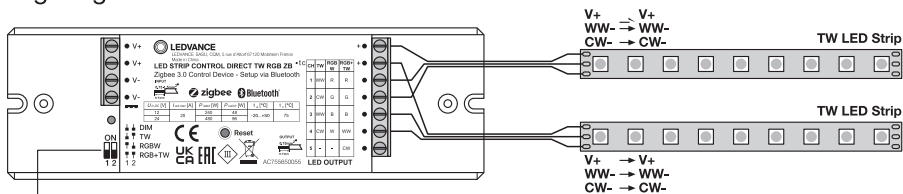


Note: please make sure the DIP Switches are at position for TW mode as shown in diagram.

Wiring diagram RGBW Mode

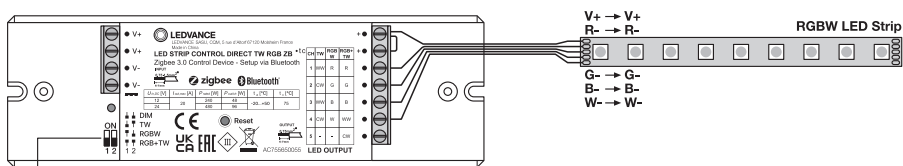

Note: please make sure the DIP Switches are at position for RGBW mode as shown in diagram.

Wiring diagram RGB+TW Mode

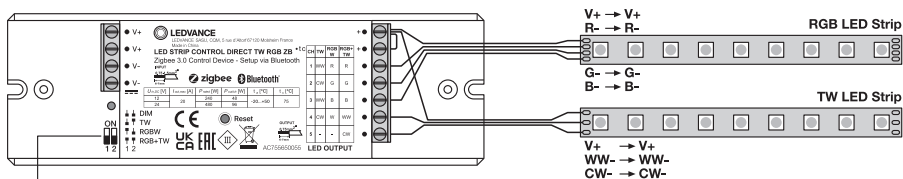

Note: please make sure the DIP Switches are at position for RGB+TW mode as shown in diagram.

Technische Unterstützung / Technical support: www.ledvance.com
 Kundenservicecenter / Service Center: kundenservice@ledvance.com
 Deutschland: Tel.: +49 89 780673-660, Fax: +49 89 780670-665
 Österreich: Tel.: +43 1 68068 118 oder 126, Fax: +43 1 68068 7



LEDVANCE SASU
 CQM, 5 rue d'Altorf
 67120 Molsheim France
www.ledvance.com

C10449057
 G11229241
 09.04.25

© LEDVANCE Ltd, Sterling House,
 810 Mandarin Court, Warrington,
 Cheshire, WA1 1GG, United Kingdom