

PRODUCT DATASHEET

SPOT ADJUST 6.50 W 3000 K WT

SPOT ADJUST | Recessed mounted spotlight, adjustable, round shape



PERFOR-
MANCE
CLASS

Areas of application

- Replacement of halogen lamp spotlights
- General illumination
- Hotel rooms
- Bars, restaurants
- Accent lighting
- Galleries, museums
- Residential interiors

Product benefits

- High luminous efficacy
- Design matches the LEDVANCE DOWNLIGHT luminaire family
- Energy savings of up to 90 % compared to halogen lamp spotlights
- Functional and minimalistic design
- Easy and quick installation
- External driver for extended flexibility (compatible with selected DALI drivers)
- 5 years guarantee

Product features

- Initial color consistency: ≤ 4 SDCM
- Housing material: aluminum
- Lens material: PMMA




TECHNICAL DATA

Electrical data


| | |
|---|-------------------------------|
| Nominal wattage | 6.50 W |
| Nominal voltage | 220...240 V |
| Mains frequency | 50...60 Hz |
| Nominal current | 28 mA |
| Max. number of luminaires per miniature circuit breaker B16 | 32 |
| Max. number of luminaires per miniature circuit breaker C10 | 26 |
| Max. number of luminaires per miniature circuit breaker C16 | 41 |
| Power factor λ | > 0.90 |
| Total harmonic distortion | < 15 % |
| Protection class | II |
| Operating mode | Electronic control gear (ECG) |

Photometrical data

| | |
|--|---------------------------|
| Luminous flux | 550 lm |
| Luminous efficacy | 85 lm/W |
| Color temperature | 3000 K |
| Light color (designation) | Warm White |
| Color rendering index Ra | > 80 |
| Standard deviation of color matching | ≤ 4 sdc _m |
| Luminous intensity | - |
| Flickering metric (Pst LM) | - |
| Stroboscope effect metric (SVM) | - |
| Photobiological safety group acc. to EN62778 | RG0 |
| Photobiological safety group acc. to EN62471 | RG0 |
| Beam angle | 36 ° |

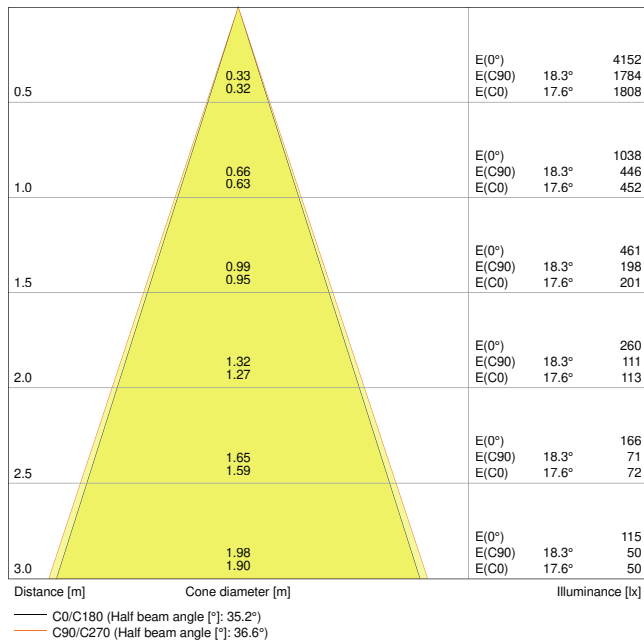


4058075000148 Spot LED adjust 6.5W 3000K 230V IP20

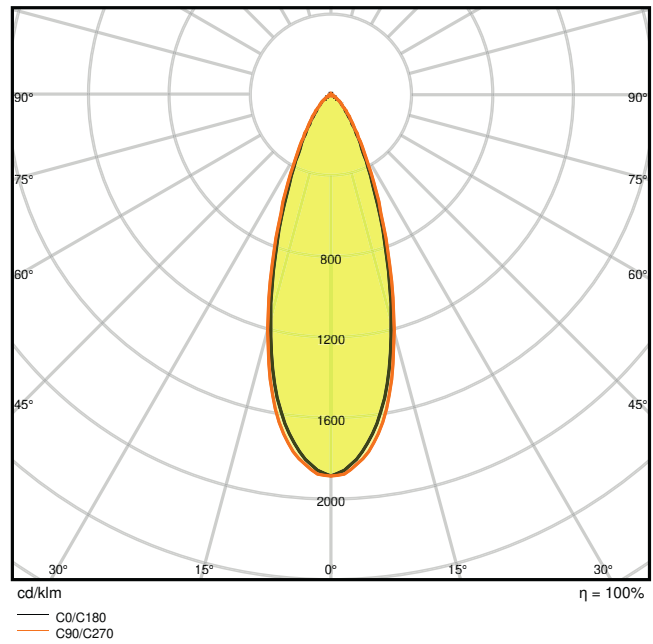

4058075000148 Spot LED adjust 6.5W 3000K 230V IP20

Dimensions & Weight

| | |
|----------------|----------|
| Diameter | 80.00 mm |
| Height | 36.00 mm |
| Product weight | 189.00 g |



707993_LEDVANCE Spot LED
adjust 4W and 6W

Materials & Colors

| | |
|---------------------------------|----------|
| Product color | White |
| Housing color | White |
| Body material | Aluminum |
| Light emitting surface material | PMMA |

| | |
|--|--------|
| Glow Wire Test according to IEC 60695-2-12 | 650 °C |
| Mercury content | 0.0 mg |

Application & Mounting

| | |
|--|------------------------------|
| Ambient temperature range | -20...+45 °C |
| Type of connection | Screw terminal, 2-Pole (L,N) |
| Type of protection | IP20 |
| Protection class IK (shock resistance) | IK06 |
| Dimmable | No |
| Mounting type | Recessed |
| Mounting location | Ceiling |
| Application environment | Indoor |
| Mounting diameter | 68 mm |
| Mounting depth | 90 mm |
| Adjustable | Yes |
| With light source | Yes |
| Replaceable light source | No |

Lifespan






| | |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C | 50000 h ¹⁾ |
| Lifespan L80/B10 at 25 °C | 40000 h ¹⁾ |
| Lifespan L80/B50 at 25 °C | 40000 h |
| Lifespan L90/B10 at 25 °C | 20000 h |
| Number of switching cycles | 100000 |








¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Certificates & Standards

| | |
|--|--------------------------------|
| Standards | CE / CB / TÜV SÜD / EAC / RoHS |
| Luminaire with limited surface temperature, "D sign" | No |
| Ball shot safe | No |
| Replaceable light source (EPREL) | Not replaceable |

DOWNLOAD DATA

| Documents and certificates | | Document name |
|--|--|---|
|  | User instruction / safety instructions | SPOT LED |
|  | On-Pack-Info | Legal Insert Spot LED |
|  | Legal information | LSI SPOT LED ADJUST AND LED FIX |
|  | Declarations of conformity | Attestation-of-Conformity-Spot LED -Fix-Adjust +Downlight LED TÜV |
|  | Declarations of conformity UKCA | SPOT LED |



| Photometric and lighting design files | | Document name |
|--|-------------------------------------|--|
|  | IES file (IES) | Spot LED adjust 6.5W 3000K 230V IP20 |
|  | LDT file (Eulumdat) | Spot LED adjust 6.5W 3000K 230V IP20 |
|  | ULD file (DIALux) | SPOTADJUST6W3000KWT |
|  | ROLF file (RELUX) | SPOT LED ADJUST 6,5W 3000K |
|  | UGR file (UGR table) | 4058075000148 Spot LED adjust 6.5W 3000K 230V IP20 |
|  | Light distribution curve type cone | 4058075000148 Spot LED adjust 6.5W 3000K 230V IP20 |
|  | Light distribution curve type polar | 4058075000148 Spot LED adjust 6.5W 3000K 230V IP20 |

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075126909 | Folding box 1 | 110 mm x 105 mm x 65 mm | 259.00 g | 0.75 dm ³ |
| 4058075126916 | Shipping box 30 | 575 mm x 230 mm x 225 mm | 8195.00 g | 29.76 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

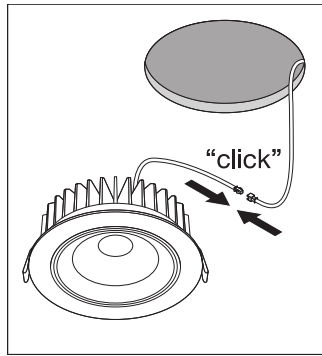

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.