





M410~430N54LB-BB F7

108CELLS HALF-CUT
N-TOPCon Bifacial PV Module Full Black

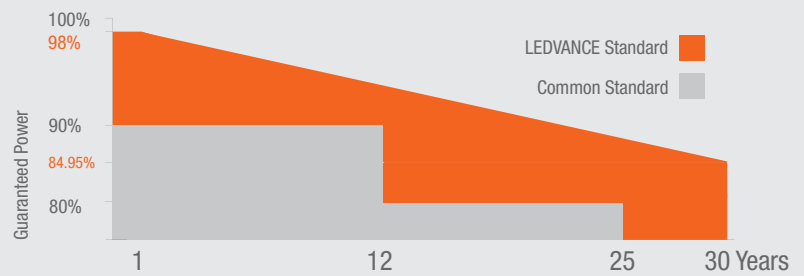

25 YEARS Product guarantee

30 YEARS Output guarantee

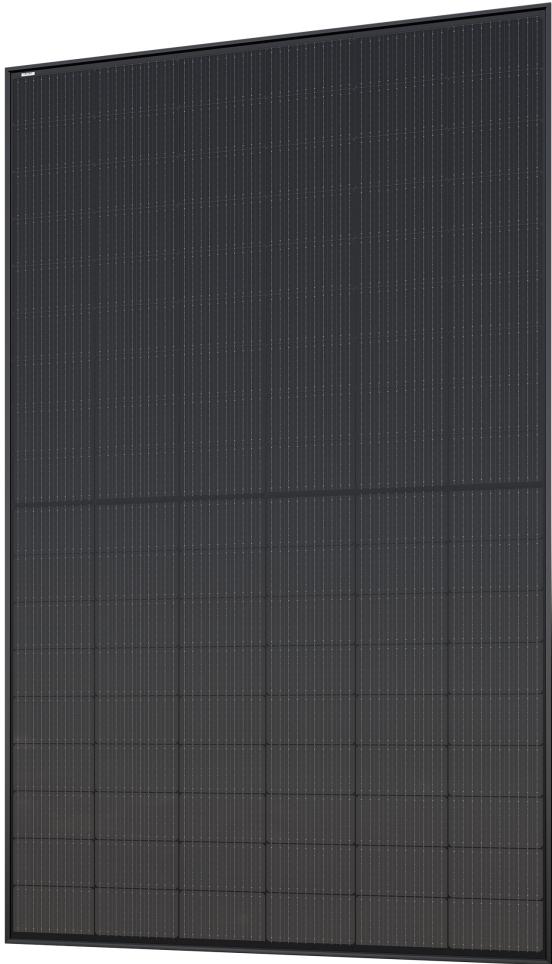

410-430Wp Power range

22,02% Maximum efficiency

≤1% Yearly degradation

MBB Excellent Cell Efficiency
Multi Bus Bar technology increases the efficiency of the modules

PID Resistance to power degradation
Resistance to power degradation caused by Potential-Induced Degradation PID effect, thanks to strict quality control in the module production process and other subassemblies

Better Weak Illumination Response
More power output in weak light conditions, such as haze, clouds and early morning

Adapted to harsh outdoor environments
Resistant to harsh environments such as salt, ammonia, sand, high temperatures and high humidity environments


Highest production standards
Guarantees of operational reliability and quality module implementations go far beyond requirements specified in certificates




IEC 61215: Design suitability and type approval
IEC 61730: Safety qualification
IEC 61701: Salt mist corrosion testing
IEC 62716: Ammonia corrosion testing
IEC 60068: Environmental testing: Dust and sand

With subsidiaries in more than 50 countries and business activities in over 150 countries, LEDVANCE is committed to supplying reliable and durable PV products to customers to create together a greener planet.


Dimensions of PV module (mm)

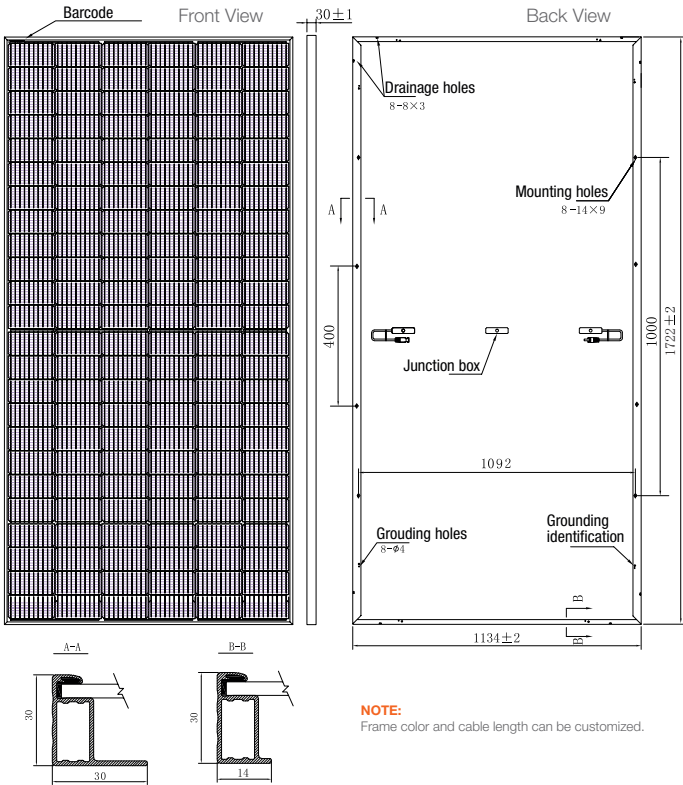

Current-voltage curve of the module by different insolation

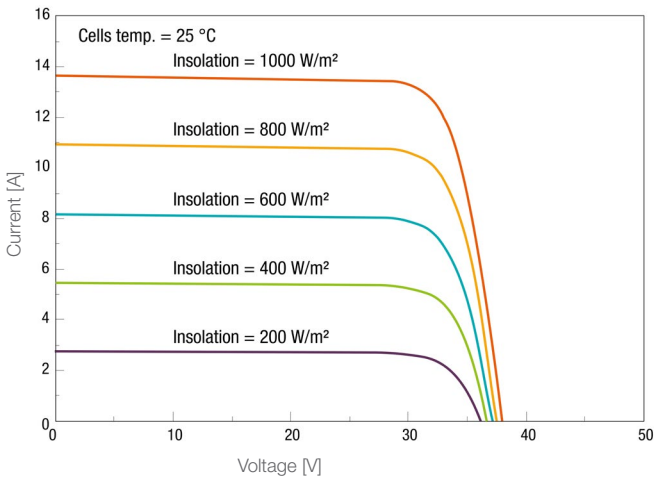

Current-voltage curve of the PV module by temperature

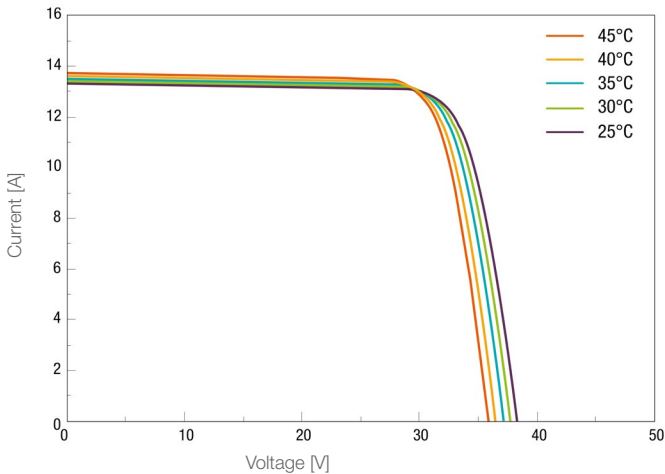

ELECTRICAL CHARACTERISTIC | STC ¹⁾

Power Level	410	415	420	425	430
Nominal power Watt P _{max} (Wp)	410	415	420	425	430
Maximum power voltage V _{mpp} (V)	31.49	31.67	31.85	32.03	32.21
Maximum power current I _{mp} (A)	13.03	13.11	13.19	13.28	13.36
Open circuit voltage V _{oc} (V)	37.51	37.70	37.89	38.08	38.27
Short circuit current I _{sc} (A)	13.81	13.91	13.99	14.07	14.13
Module efficiency η(%)	21.00	21.25	21.51	21.76	22.02

Measuring tolerance: ±3%

Bifacial Output-Backside Power Gain

	451	456	462	467	473
10% Maximum power P _{max} (Wp)	451	456	462	467	473
10% Module efficiency η(%)	23.10	23.38	23.66	23.94	24.22
20% Maximum power P _{max} (Wp)	492	498	504	510	516
20% Module efficiency η(%)	25.20	25.50	25.81	26.11	26.42

ELECTRICAL CHARACTERISTIC | NMOT ²⁾

Power Level	410	415	420	425	430
Maximum power P _{max} (Wp)	311	315	319	323	327
Maximum power voltage V _{mpp} (V)	29.63	29.81	29.99	30.17	30.34
Maximum power current I _{mp} (A)	10.50	10.57	10.64	10.71	10.78
Open circuit voltage V _{oc} (V)	36.06	36.24	36.42	36.60	36.78
Short circuit current I _{sc} (A)	11.26	11.33	11.40	11.47	11.54

Measuring tolerance: ±3%

WORKING CONDITIONS

Maximum system voltage	1500 V DC
Operating temperature	-40°C ~ +85°C
Operating humidity	5~85%
Maximum series fuse	30 A
Front/Rear side load	5400 pa / 2400 pa

MECHANICAL DATA

Solar cells	N-TOPCon
Number of cells	108(6x18) pcs
Module dimension	1722 x 1134 x 30 mm
Frame color	Black
Weight	24.0 kg
Front glass	2.0 mm coated semi-tempered glass
Back glass	2.0 mm glazed semi-tempered glass
Type of frame	Anodized aluminum alloy
Junction box	IP68, 3 diodes
Cables	4 mm ² , 300 mm or 1200 mm
Connectors	Stäubli MC4 EVO 2

TEMPERATURE RATINGS

NMOT	45±2 °C
Temperature coefficient of P _{max}	-0.29% / °C
Temperature coefficient of V _{oc}	-0.26% / °C
Temperature coefficient of I _{sc}	0.045% / °C

PACKAGING CONFIGURATION

Piece / Box	36
Size of packing	1770 x 1140 x 1144 mm
Weight of packing	886 kg
Piece / Container (40'HC)	936

FOOTNOTES:

- 1) STC (Standard Test Conditions): 1000W/m² solar irradiance, cell temperature 25°C, AM 1.5G
- 2) NMOT (nominal cell operating temperature): insolation 800W/m², ambient temperature 20°C, AM 1.5G, wind speed 1m/s

CAUTION:

- Do not connect two or more strings of modules to one fuse.
- The electrical data in this product sheet does not refer to a single module and is not part of the offer, it is used to compare different types of modules only.
- Due to continuous technical innovation, development and product improvement, technical data contained in this product sheet is subject to change at any time without notice and may not be the basis for any damage claims.